


## 8" TYPICAL CONCRETE WALL DETAILS

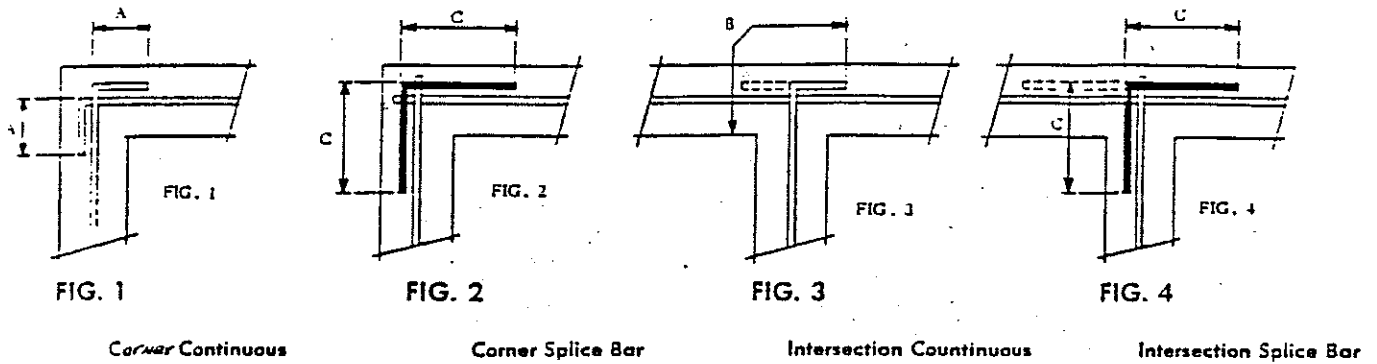

### SINGLE CURTAIN REINFORCING

NOTES: 1. Code

A = 24 bar diameters for yield strengths of 40,000 psi or specified lap, whichever is greater.

B = 30 bar diameters for yield strengths of 50,000 psi or specified lap, whichever is greater.

C = 36 bar diameters for yield strengths of 60,000 psi or specified lap, whichever is greater.


2. For clarity, the above illustrations have been modified as follows—

a—Rounding of hooks has not been indicated.

b—Horizontals and hooks are shown as separated, actually their faces are flush.

c—Vertical reinforcement has not been shown.

d—on intersection walls, hook direction should change on alternate bars.

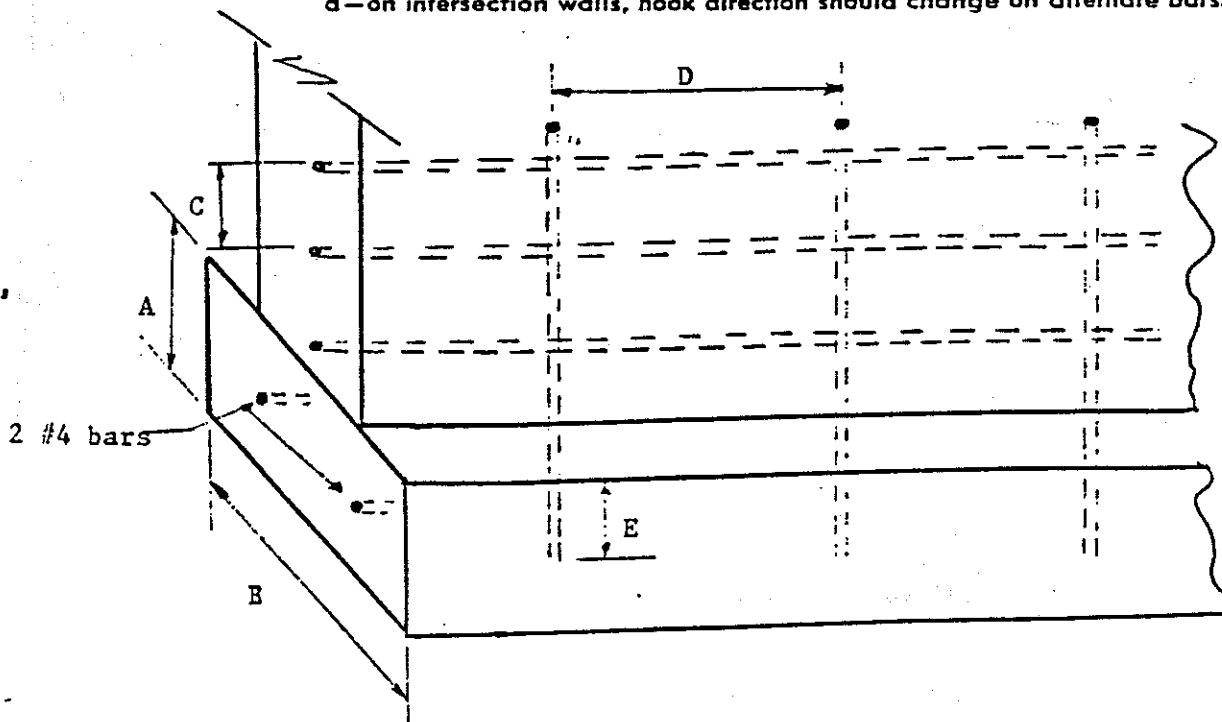

NOTES:

A = 8" ftg.

B = 16" ftg.

C = Horizontal reinforcement 2' oc #4 bars

D = Vertical reinforcement 4' oc #4 bars

E = 4"